




## 1.1 Screw-in heating element G1½



### Model C/INC/3/G 1½

<b>Application</b>	direct water heating
<b>Design</b>	3 tubular heating elements made of special material mat.-no. 2.4858 (alloy 825), 35 mm unheated, brass nipple G 1½, bright-galvanized steel-cap, IP 30
<b>Electrical Connection</b>	230 V AC single-phase current or 230/400 V three-phase current 12 000 Watt only available in 3 x 400 V, delta connection

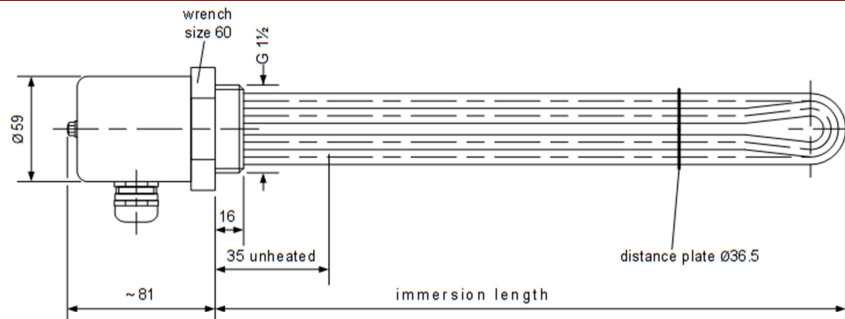

**Special design** Other lengths, unheated areas, powers, voltages, thread G 2 and protection type IP65 are available. For heating up domestic hot water in steel enamelled pressure-type storages, see page 1.7.

Immersion length [mm] approx.	Power [Watt] approx.	Surface load [Watt/cm <sup>2</sup> ]	Weight [kg] approx.	Article-no.
175	2000	9.0	0.7	0101 4011
230	3000	9.7	0.8	0101 4021
330	4500	9.6	1.0	0101 4031
405	6000	10.2	1.1	0101 4041
520	7500	9.8	1.3	0101 4051
620	9000	9.7	1.5	0101 4061
770	12000	10.3	1.9	0101 4071